查询L7900AC SERIES供应商

L7900AC SERIES

2% NEGATIVE VOLTAGE REGULATORS

- OUTPUT CURRENT UP TO 1.5 A
- OUTPUT VOLTAGES OF -5; -5.2; -6; -8; -12; -15; -18; -20; -22; -24V
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- OUTPUT TRANSITION SOA PROTECTION



D^2PAK



TO-220

DESCRIPTION

The L7900AC series of three-terminal negative regulators is available in TO-220 and D^2PAK packages and several fixed output voltages. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation; furthermore, having the same voltage option as the L7800A positive standard series, they are particularly suited for split power supplies. In addition, the -5.2V is also available for ECL system. If adequate heat sinking is provided, they can deliver over 1.5A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

SCHEMATIC DIAGRAM

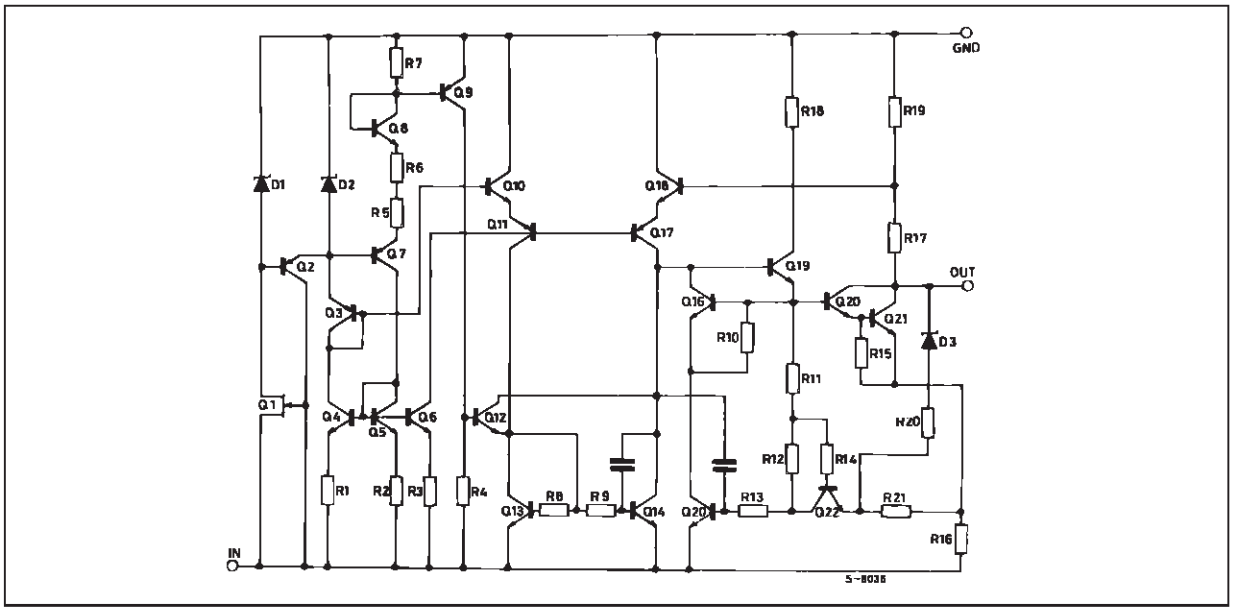

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_i	DC Input Voltage (for V_O = -5 to -18V) (for V_O = -20, -24V)	-35 -40	V V
I_o	Output Current	Internally limited	
P_{tot}	Power Dissipation	Internally limited	
T_{op}	Operating Junction Temperature Range	0 to 125	°C
T_{stg}	Storage Temperature Range	- 65 to 150	°C

THERMAL DATA

Symbol	Parameter		D^2PAK	TO-220	Unit
$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	3	3	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	Max	62.5	50	°C/W

CONNECTION DIAGRAM AND ORDERING NUMBERS (top view)

TO-220 D^2PAK

Type	TO-220	D^2PAK (*)	Output Voltage
L7905AC	L7905ACV	L7905ACD2T	-5V
L7952AC	L7952ACV	L7952ACD2T	-5.2V
L7906AC	L7906ACV	L7906ACD2T	-6V
L7908AC	L7908ACV	L7908ACD2T	-8V
L7912AC	L7912ACV	L7912ACD2T	-12V
L7915AC	L7915ACV	L7915ACD2T	-15V
L7918AC	L7918ACV	L7918ACD2T	-18V
L7920AC	L7920ACV	L7920ACD2T	-20V
L7922AC	L7922ACV	L7922ACD2T	-22V
L7924AC	L7924ACV	L7924ACD2T	-24V

(*) AVAILABLE IN TAPE AND REEL WITH "-TR" SUFFIX

APPLICATION CIRCUIT

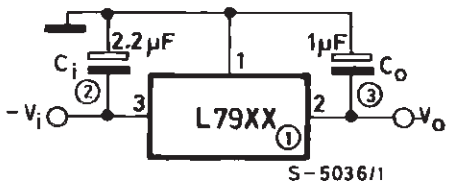

ELECTRICAL CHARACTERISTICS FOR L7905A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -10V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-4.9	-5	-5.1	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = 8 to 20 V	-4.8	-5	-5.2	V
ΔV_o*	Line Regulation	V_i = -7 to -25 V T_j = 25 °C V_i = -8 to -12 V T_j = 25 °C			100 50	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			100 50	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -8 to -25 V			1.3	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.4		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		100		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.4		V
I_{sc}	Short Circuit Current			2.1		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.5		A

ELECTRICAL CHARACTERISTICS FOR L7952A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -10V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-5.1	-5.2	-5.3	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -9 to -21 V	-5	-5.2	-5.4	V
ΔV_o*	Line Regulation	V_i = -8 to -25 V T_j = 25 °C V_i = -9 to -13 V T_j = 25 °C			105 52	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			105 52	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -9 to -25 V			1.3	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.5		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		125		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.4		V
I_{sc}	Short Circuit Current			2.1		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.5		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7906A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -11V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-5.88	-6	-6.12	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -9.5 to -21.5 V	-5.76	-6	-6.24	V
ΔV_o*	Line Regulation	V_i = -8.5 to -25 V T_j = 25 °C V_i = -9 to -15 V T_j = 25 °C			120 60	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			120 60	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -9.5 to -25 V			1.3	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.6		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		144		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.4		V
I_{sc}	Short Circuit Current			2		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.5		A

ELECTRICAL CHARACTERISTICS FOR L7908A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -14V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-7.84	-8	-8.16	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -11.5 to -23 V	-7.68	-8	-8.32	V
ΔV_o*	Line Regulation	V_i = -10.5 to -25 V T_j = 25 °C V_i = -11 to -17 V T_j = 25 °C			160 80	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			160 80	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -11.5 to -25 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.6		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		175		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.5		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.5		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7912A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -19V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-11.75	-12	-12.25	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -15.5 to -27 V	-11.5	-12	-12.5	V
ΔV_o*	Line Regulation	V_i = -14.5 to -30 V T_j = 25 °C V_i = -16 to -22 V T_j = 25 °C			240 120	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			240 120	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -15 to -25 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.8		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		200		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.5		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.5		A

ELECTRICAL CHARACTERISTICS FOR L7915A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -23V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-14.7	-15	-15.3	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -18.5 to -30 V	-14.4	-15	-15.6	V
ΔV_o*	Line Regulation	V_i = -17.5 to -30 V T_j = 25 °C V_i = -20 to -26 V T_j = 25 °C			300 150	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			300 150	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -18.5 to -30 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-0.9		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		250		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.3		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.3		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7918A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -27V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-17.64	-18	-18.36	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -22 to -33 V	-17.3	-18	-18.7	V
ΔV_o*	Line Regulation	V_i = -21 to -33 V T_j = 25 °C V_i = -24 to -30 V T_j = 25 °C			360 180	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			360 180	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -22 to -33 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		300		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.1		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

ELECTRICAL CHARACTERISTICS FOR L7920A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -29V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-19.6	-20	-20.4	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -24 to -35 V	-19.2	-20	-20.8	V
ΔV_o*	Line Regulation	V_i = -23 to -35 V T_j = 25 °C V_i = -26 to -32 V T_j = 25 °C			400 200	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			400 200	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -24 to -35 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1.1		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		350		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			0.9		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7922A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -31V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-21.5	-22	-22.4	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -26 to -37 V	-21.1	-22	-22.8	V
ΔV_o*	Line Regulation	V_i = -25 to -37 V T_j = 25 °C V_i = -28 to -34 V T_j = 25 °C			440 220	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			440 220	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -26 to -37 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1.1		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		375		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.1		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

ELECTRICAL CHARACTERISTICS FOR L7924A (refer to the test circuits, T_j = 0 to 125 °C, V_i = -33V, I_o = 500 mA, C_i = 2.2 µF, C_o = 1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	-23.5	-24	-24.5	V
V_o	Output Voltage	I_o = -5 mA to -1 A $P_o \leq$ 15 W V_i = -27 to -38 V	-23	-24	-25	V
ΔV_o*	Line Regulation	V_i = -27 to -38 V T_j = 25 °C V_i = -30 to -36 V T_j = 25 °C			480 240	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			480 240	mV mV
I_d	Quiescent Current	T_j = 25 °C			3	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = -27 to -38 V			1	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1		mV/°C
e_N	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		400		µV
SVR	Supply Voltage Rejection	ΔV_i = 10 V f = 120 Hz	54	60		dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C ΔV_O = 100 mV		1.1		V
I_{sc}	Short Circuit Current			1.1		A
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

APPLICATION INFORMATION

Figure 1 : Fixed Output Regulator.

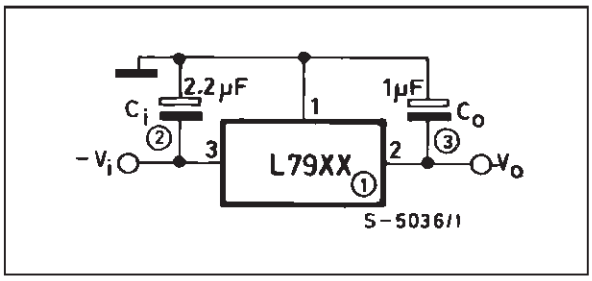

Notes :
1. To specify an output voltage, substitute voltage value for "XX".
2. Required for stability. For value given, capacitor must be solid tantalum. If aluminium electrolitics are used, at least ten times value should be selected. C_1 is required if regulator is located an appreciable distance from power supply filter.
3. To improve transient response. If large capacitors are used, a high current diode from input to output (1N4001 or similar) should be introduced to protect the device from momentary input short circuit.

Figure 2 : Split Power Supply (± 15V/1A).

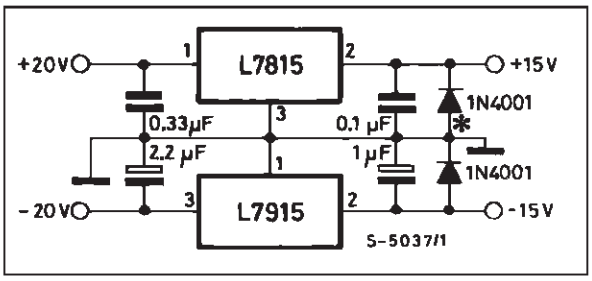

Against potential latch-up problems.

Figure 3 : Circuit for Increasing Output Voltage.

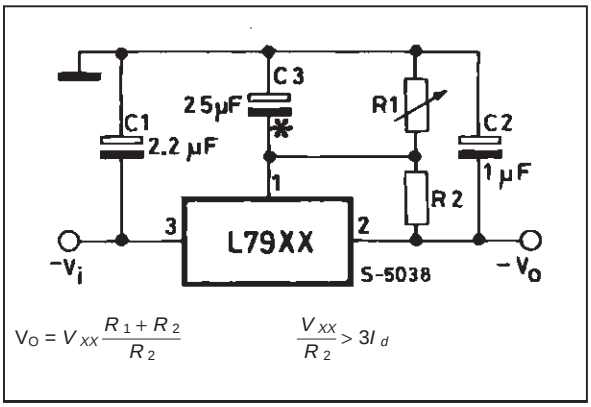

C3 Optional for improved transient response and ripple rejection.

Figure 4 : High Current Negative Regulator (– 5V/4A with 5A current limiting).

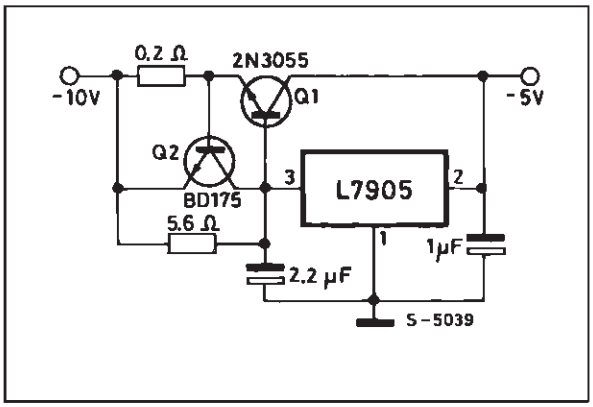

Figure 5 : Typical ECL System Power Supply (– 5.2V/4A).

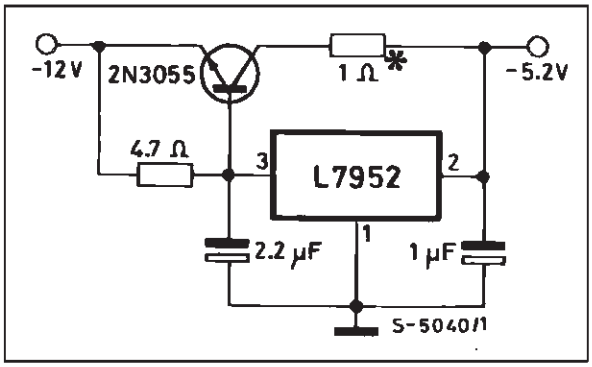

Optional dropping resistor to reduce the power dissipated in the boost transistor.

TO-220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			4.8			0.189
C			1.37			0.054
D	2.4		2.8	0.094		0.110
D1	1.2		1.35	0.047		0.053
E	0.35		0.55	0.014		0.022
F	0.61		0.94	0.024		0.037
F2	1.15		1.4	0.045		0.055
G	4.95	5.08	5.21	0.195	0.200	0.205
H2			10.4			0.409
H3	10.05		10.4	0.396		0.409
L2		16.2			0.638	
L3	26.3	26.7	27.1	1.035	1.051	1.067
L5	2.6		3	0.102		0.118
L6	15.1		15.8	0.594		0.622
L7	6		6.6	0.236		0.260
Dia.	3.65		3.85	0.144		0.152

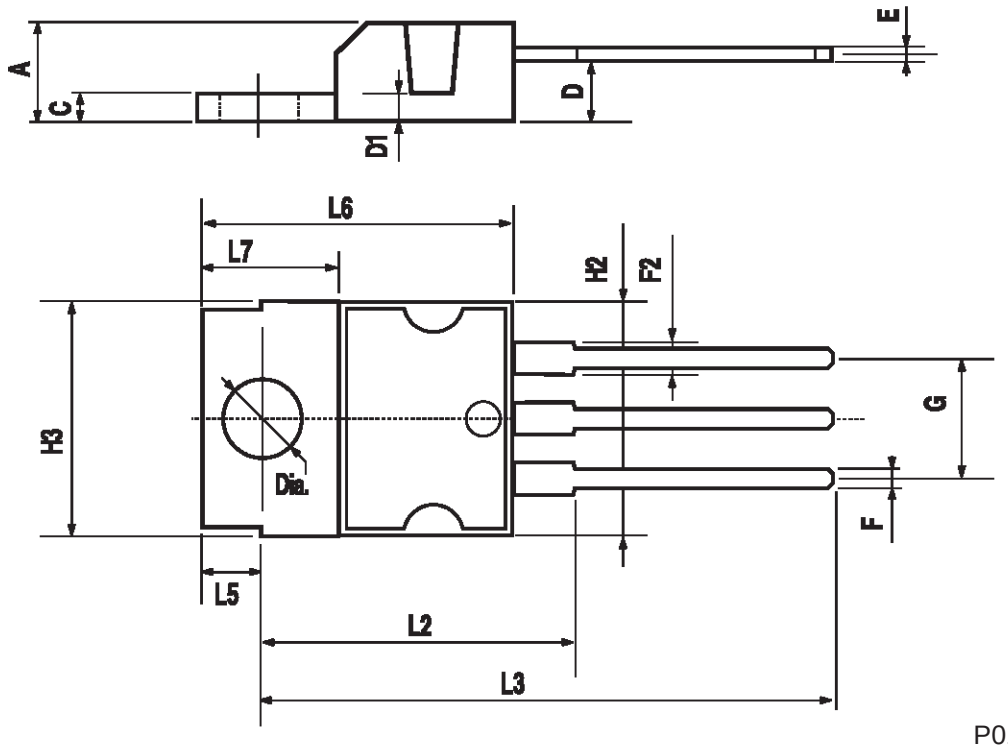

P011D

TO-263 (D^2PAK) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.3		4.6	0.169		0.181
A1	2.49		2.69	0.098		0.106
B	0.7		0.93	0.027		0.036
B2	1.25		1.4	0.049		0.055
C	0.45		0.6	0.017		0.023
C2	1.21		1.36	0.047		0.053
D	8.95		9.35	0.352		0.368
E	10		10.28	0.393		0.404
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.624
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068

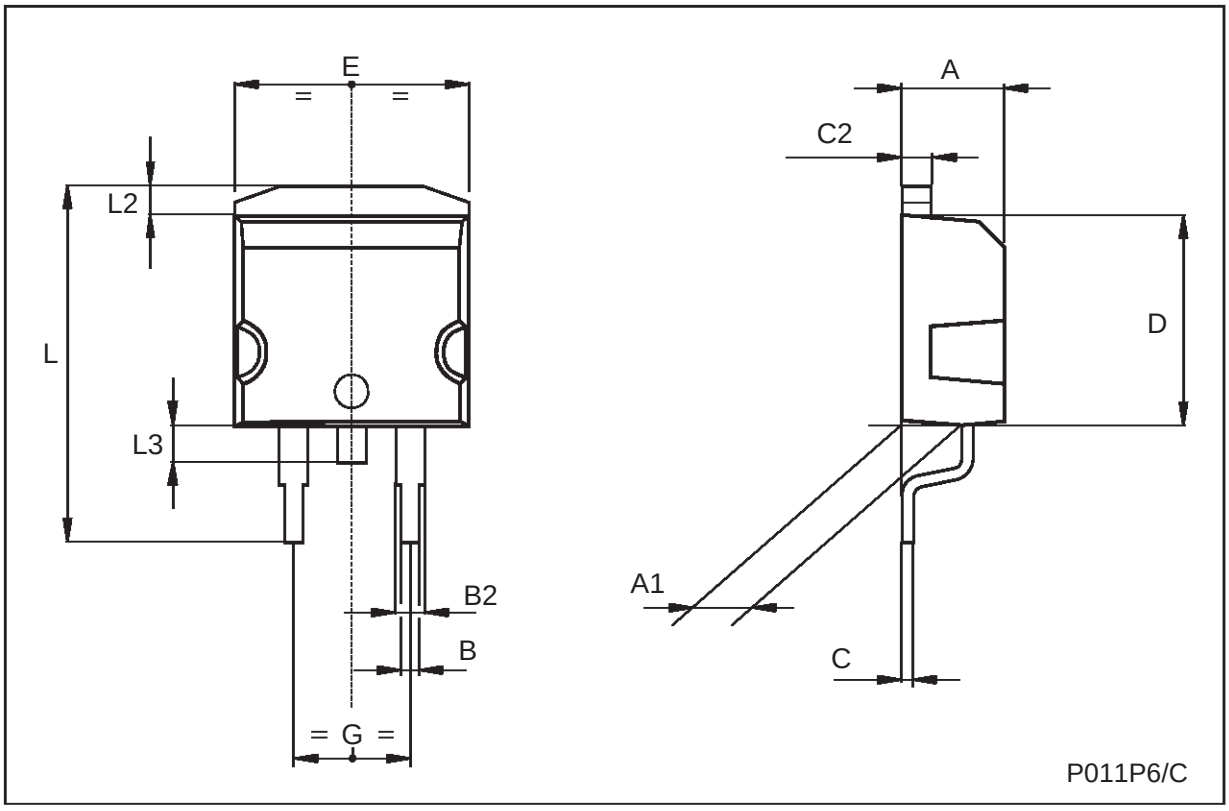

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

.